



#### **Features**

- 3D LED Color Temperature Lights with Dimmable touch control
- Mirrored interior with 4 adjustable glass shelves
- Includes Digital Clock
- Includes Defogger with push button
- Includes one USB outlet
- Includes an adjustable makeup mirror
- Includes installation hardware for recess mounting
- Can be recessed or surface mounted (surface mounting is included )
- · Interior Light with sensor switch
- Energy efficient LED lighting:

| Kelvin          | 3000 | 6500 | 4500 mixed color |
|-----------------|------|------|------------------|
| CRI             | 80+  | 80+  | 80+              |
| Lumens*†        | 900  | 900  | 1800             |
| R9 Value*       | 50+  | 50+  | 50+              |
| Watts (AC)      | 100  | 100  | 100              |
| Lumens per Watt | 90   | 90   | 90               |

### Construction

- Grey aluminum body and door frame
- 3 mirror design rear of cabinet and both sides of door
- Concealed finger pull-door edge
- Three pieces DTC 155° self-closing hinges for each door
- Adjustable shelving at 2 1/3" (60 mm) increments
- Single field wire into electrical shelf Front access serviceability

### **Codes/Standards Applicable**

Electric Option Models are ETL certified to:

- UL 962
- CSA Standard C22.2 No. 68


#### **Dimensions**


Height: 36" (913 mm)

Width: 36" (915 mm)

Depth: 5" (127 mm) When surface mounted

1" (25 mm) When recessed

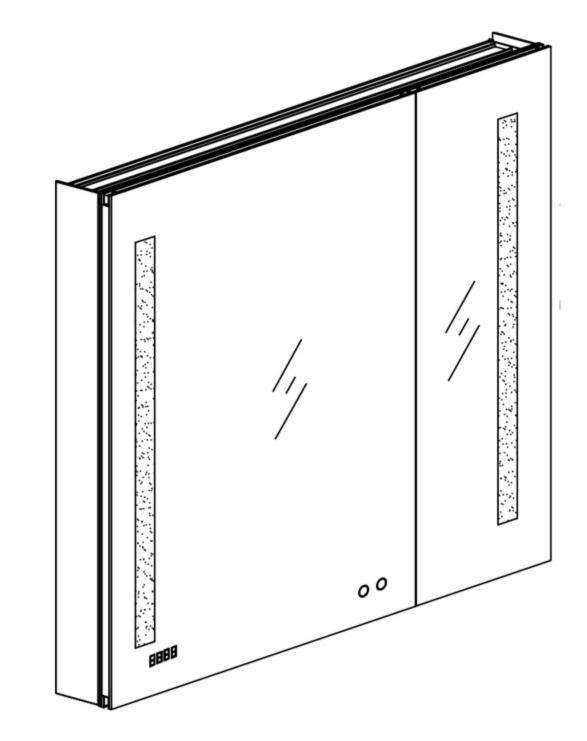

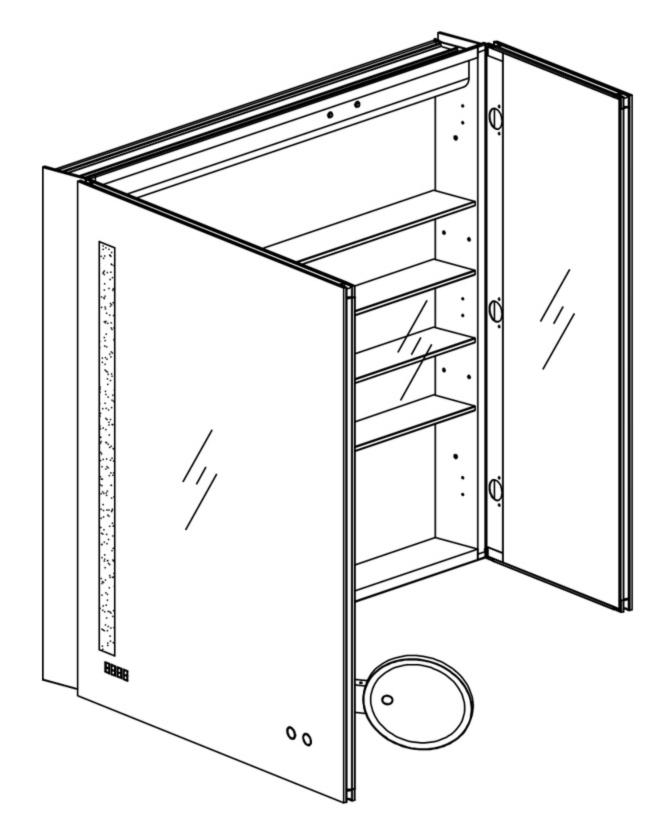


USA/Canada: 800-654-0016

# **Installation Options**


- Recessed Mount Rough Opening 35-1/2" H x 35-1/2" W x 4" D
  (901mm H x 901mm W x 102mm D)
- Surface Mount Surface Mount Kit is included

## **Electrical System**


- 100 Watts LED Driver
- INPUT: 120VAC 60HZ 2.2A
- OUTPUT : 12VAC 8.5A
- Field wire location as shown in drawing
- 1/2" conduit (Ø 7/8" actual) electrical knockout location shown below
- Included field wire cable clamp
- Circuit Diagram

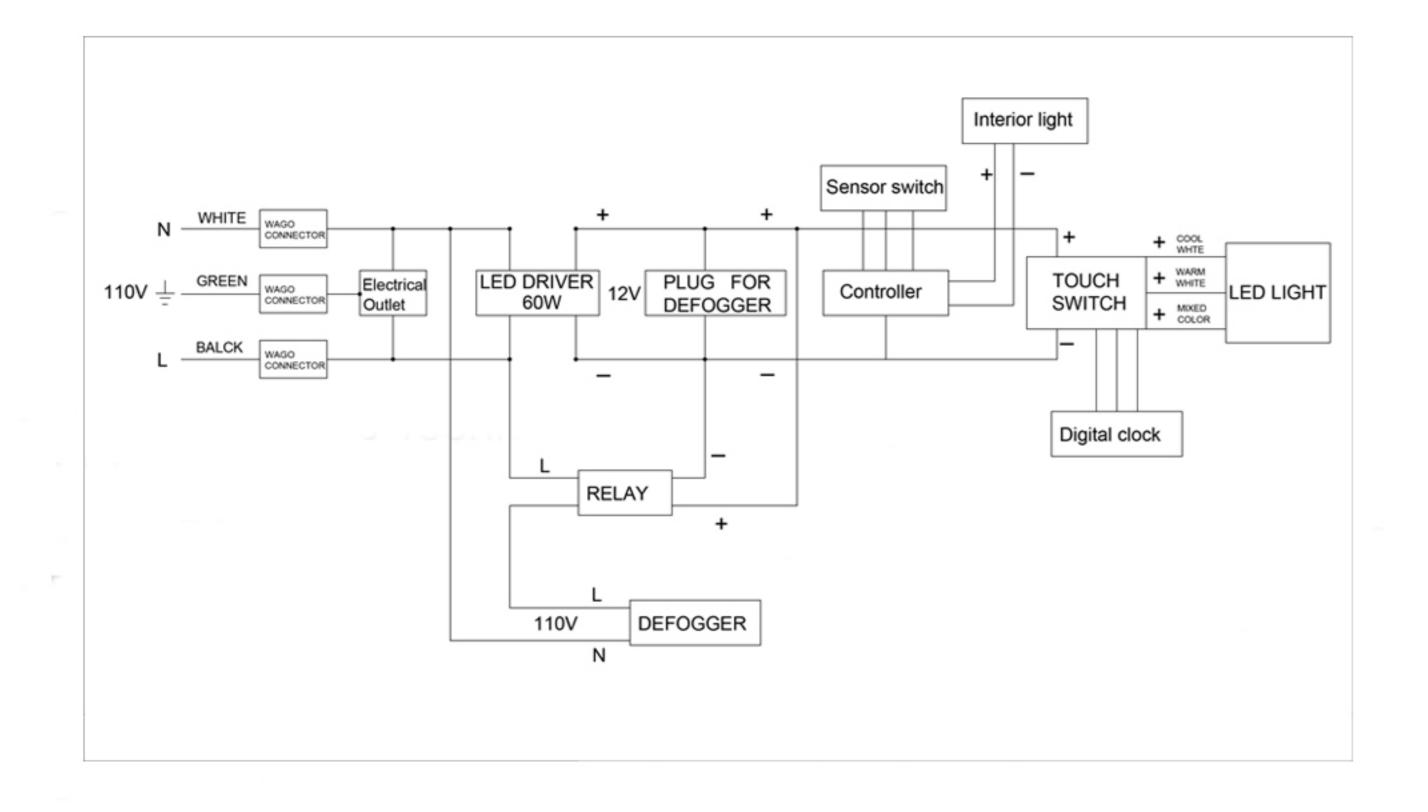


Circuit Diagram

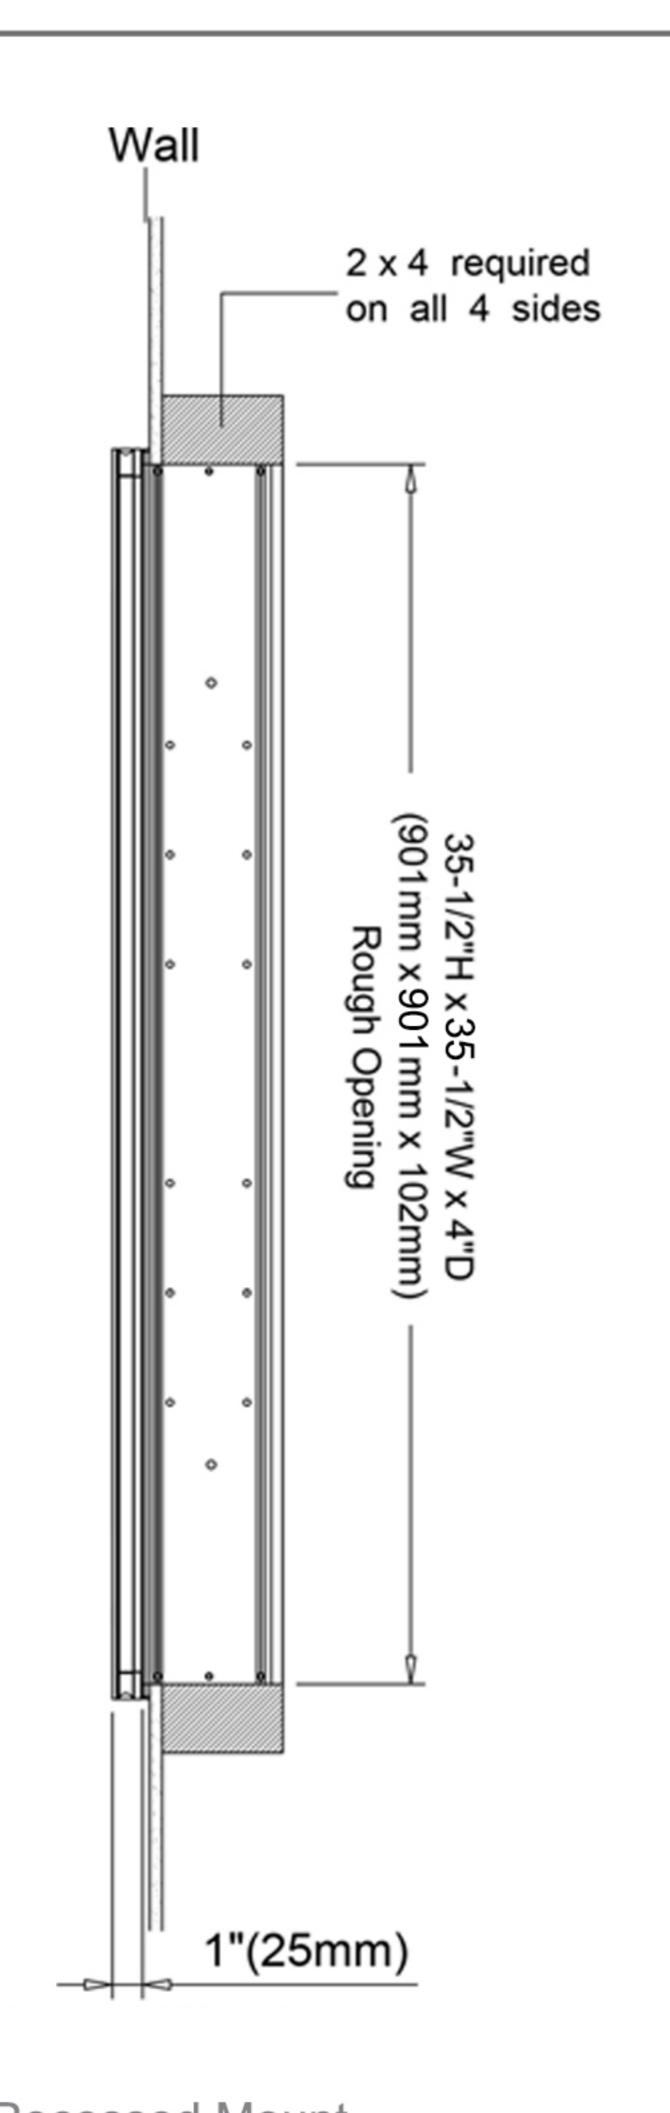


Recessed Mount

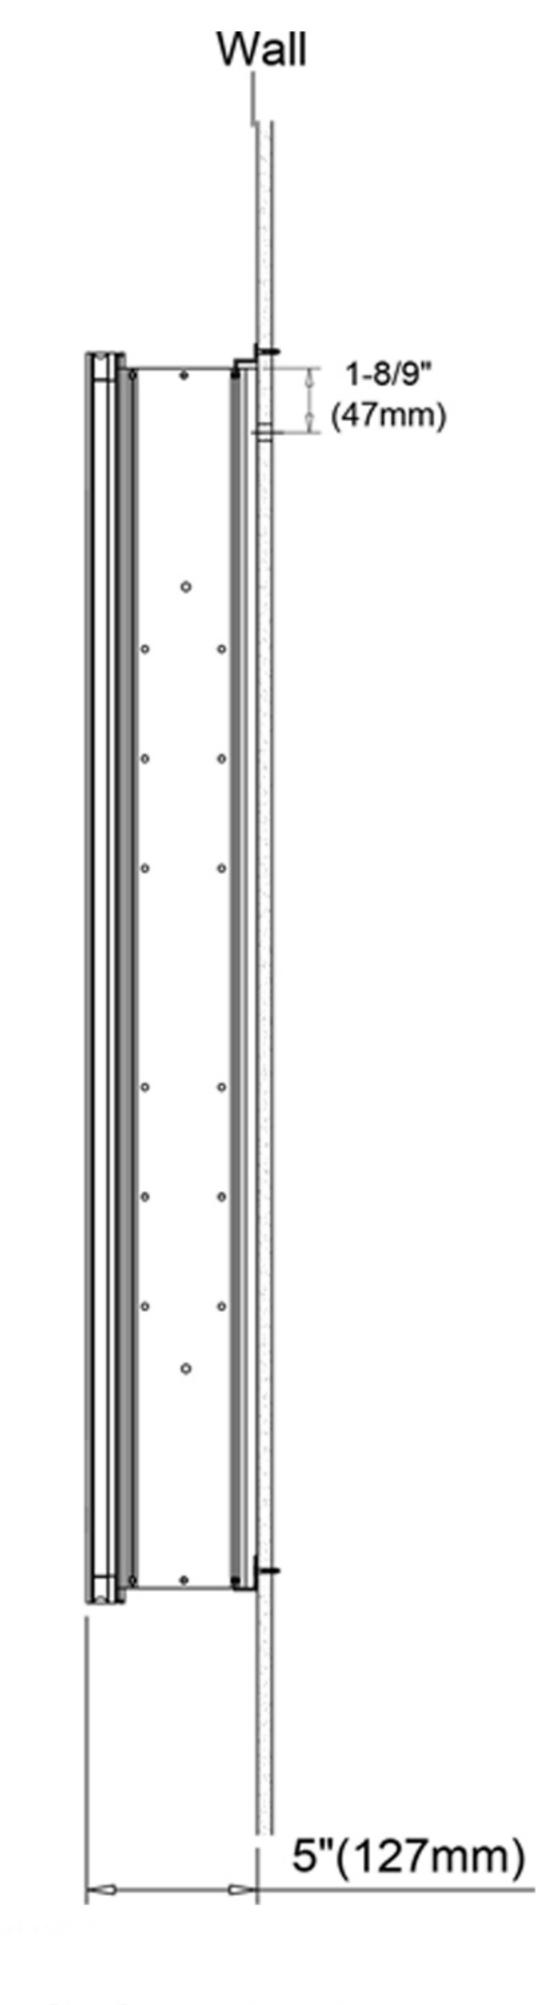


Surface Mount

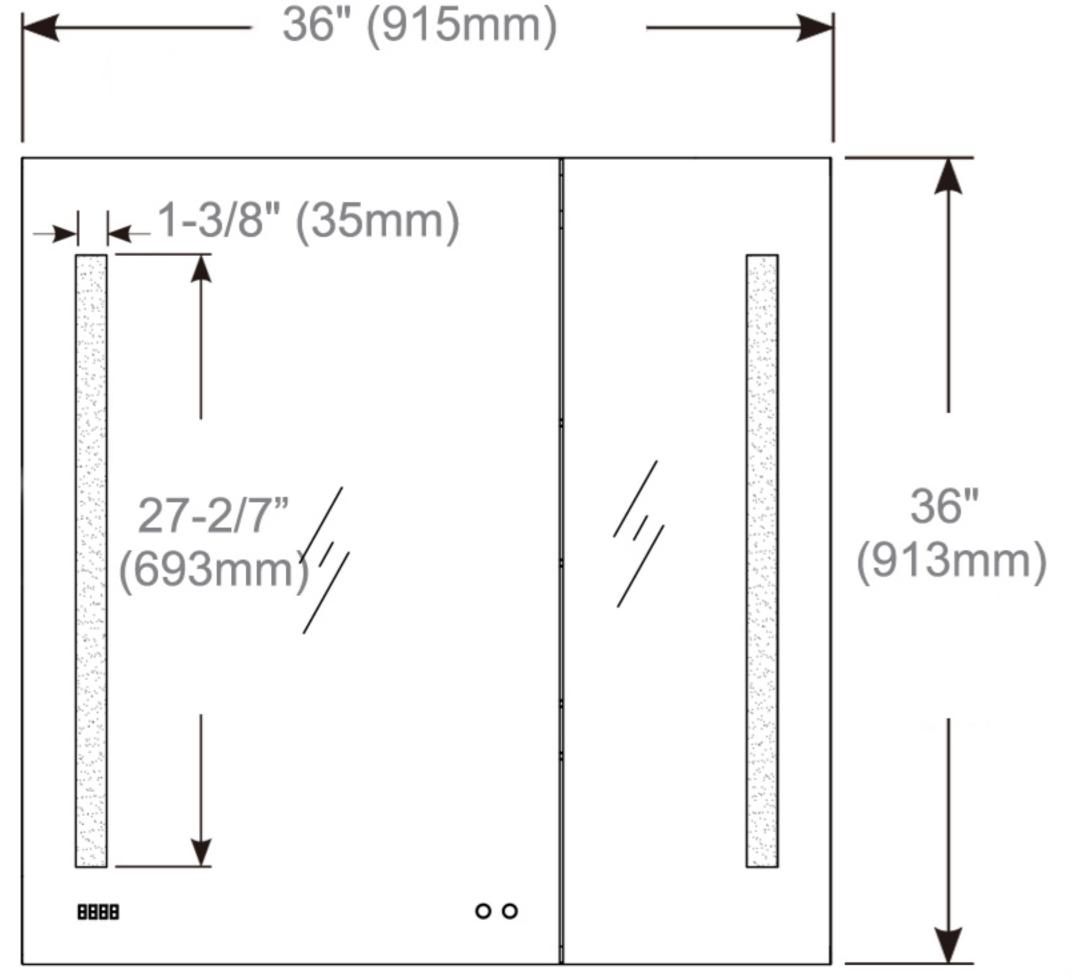

Cabinet Dimensions

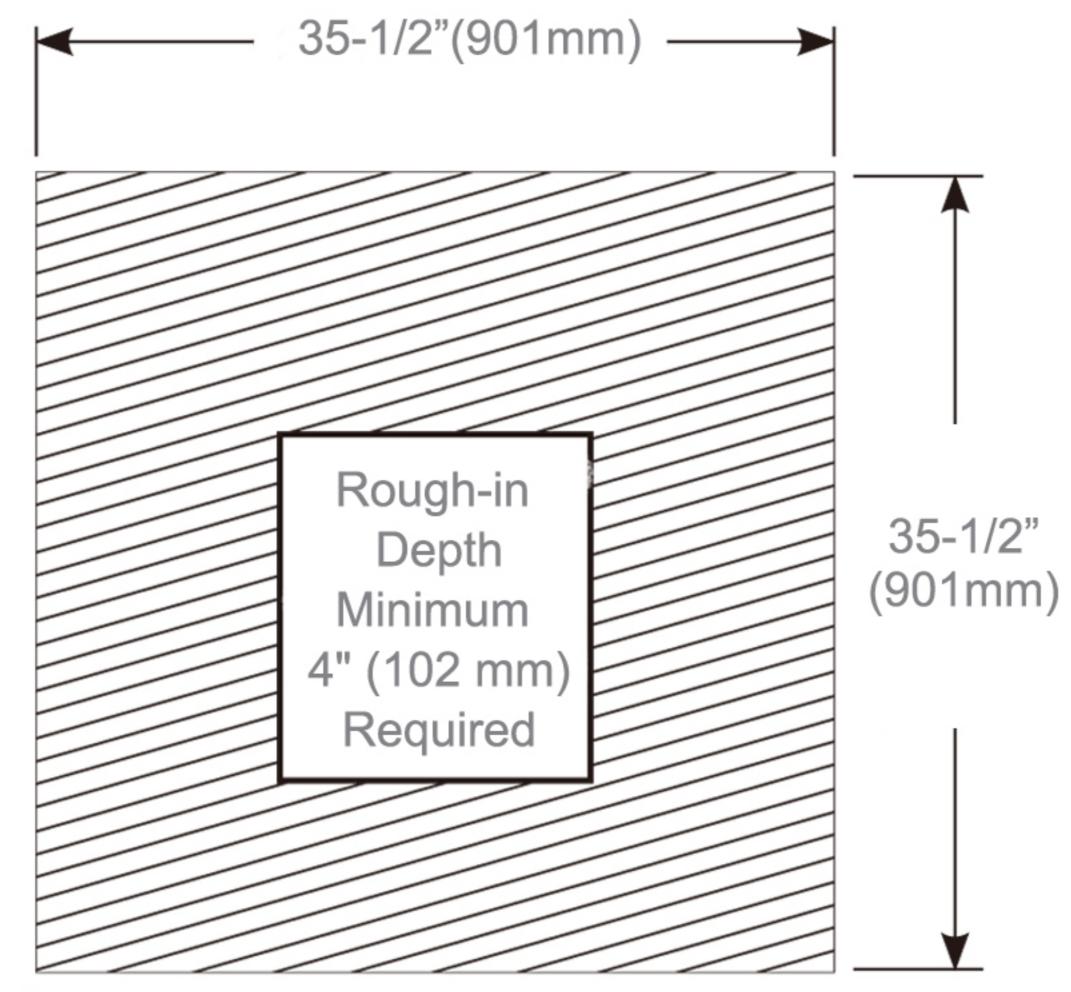

Rough-in Dimensions

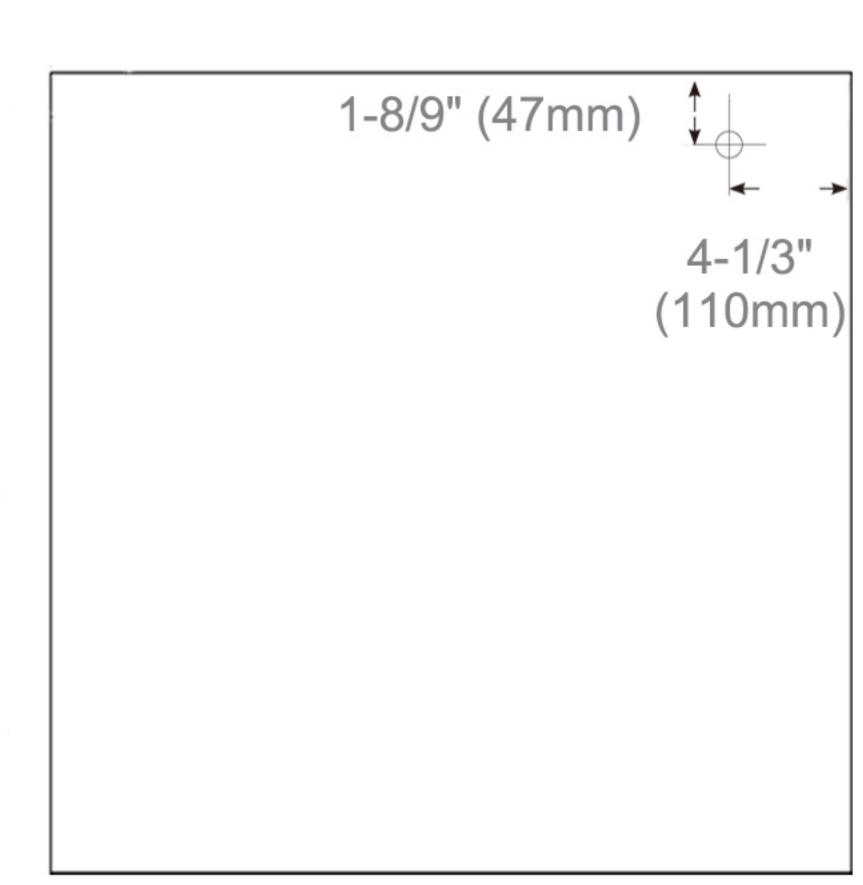

Back of Cabinet - Wire Access Location